


strands®

-lighting division



FIREFLY ONE DRIVING LIGHT

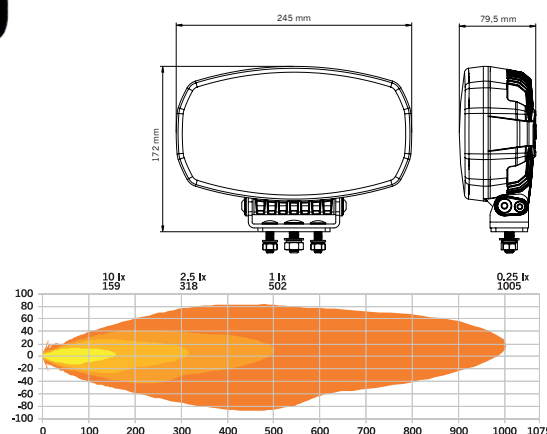

Voltage	10-48V DC
Consumption: high beam:	146 W
Consumption: warning light:	36 W
Theoretical lumen	15 400 lm
Actual lumen	10 500 lm
1 lux @	502 m
IP-class	IP67
Color Temperature	5700K
Beam pattern	Optimized beam
Functions	High beam, position light, warning light
Connection	Cable

Cable length	2500 mm
Material housing	Aluminium
Material lens	Polycarbonate
Length	245 mm
Depth	79,5 mm
Height	154,5 mm
Height including bracket	172 mm
Operating temperature	-40°C - +65°C
E-approved	ECE R65 (XA2) R148, R149
Ref	45
EMC-certificate	ECE R10

Part No. 270953