



# strands®

-lighting division

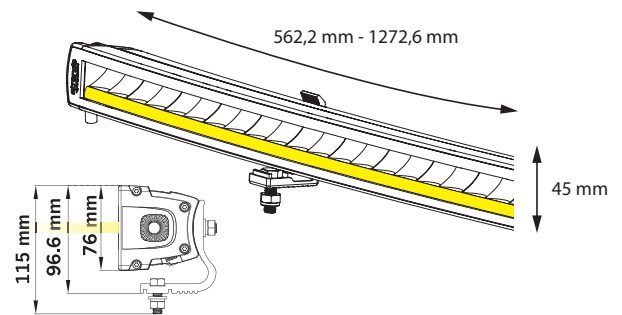

## SIBERIA XP SRC

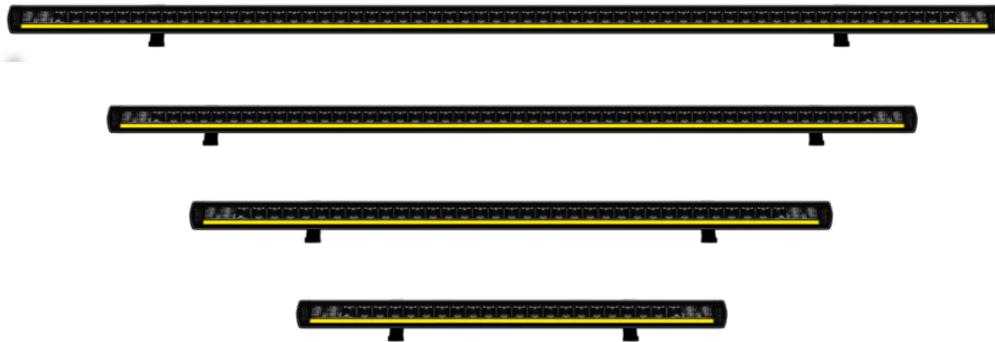

| PART NO.                     | 809416           | 809417           | 809418           | 809419           |
|------------------------------|------------------|------------------|------------------|------------------|
| VOLTAGE                      | 10-32V DC        | 10-32V DC        | 10-32V DC        | 10-32V DC        |
| CONSUMPTION, XPERIENCE-MODE  | 107W             | 164W             | 234W             | 235W             |
| CONSUMPTION, E-MODE          | 45W              | 55W              | 70W              | 80W              |
| ACTUAL LUMEN, XPERIENCE-MODE | 7050 lm          | 10 600 lm        | 13 700 lm        | 15 600 lm        |
| ACTUAL LUMEN, E-MODE         | 3175 lm          | 3600 lm          | 4175 lm          | 4275 lm          |
| 1 LUX @, XPERIENCE-MODE      | 467 m            | 478 m            | 530 m            | 513 m            |
| 1 LUX @, E-MODE              | 387 m            | 333 m            | 361 m            | 355 m            |
| COLOR TEMPERATURE            | 5700K            | 5700K            | 5700K            | 5700K            |
| BEAM PATTERN                 | Extended beam    | Extended beam    | Extended beam    | Extended beam    |
| IP-CLASS                     | IP68/IP69K       | IP68/IP69K       | IP68/IP69K       | IP68/IP69K       |
| COLOR LENS                   | Clear            | Clear            | Clear            | Clear            |
| HELLO FUNCTION               | Yes              | Yes              | Yes              | Yes              |
| POSITION LIGHT               | White and Yellow | White and Yellow | White and Yellow | White and Yellow |
| CONNECTION                   | Cable            | Cable            | Cable            | Cable            |
| CABLE LENGTH                 | 2500 mm          | 2500 mm          | 2500 mm          | 2500 mm          |
| MATERIAL HOUSING             | Aluminium        | Aluminium        | Aluminium        | Aluminium        |
| MATERIAL LENS                | Polycarbonate    | Polycarbonate    | Polycarbonate    | Polycarbonate    |
| LENGTH                       | 562,2 mm         | 817,1 mm         | 1070,4 mm        | 1272,6 mm        |
| DEPTH                        | 67,7 mm          | 82,4 mm          | 102,6 mm         | 122,8 mm         |
| HEIGHT                       | 45 mm            | 45 mm            | 45 mm            | 45 mm            |
| HEIGHT INCLUDING BRACKET     | 64,5 mm          | 64,5 mm          | 64,5 mm          | 64,5 mm          |
| OPERATING TEMPERATURE        | -35°C · +65°C    | -35°C · +65°C    | -35°C · +65°C    | -35°C · +65°C    |
| E-APPROVED                   | No               | No               | No               | No               |
| EMC-CERTIFICATE              | ECE R10          | ECE R10          | ECE R10          | ECE R10          |